

DA 9091 W Screen

Wall mounted cooker hood

With vertical glass front and extremely flat design for more headroom.



- Linear design with 880 mm width and minimum depth of 260 mm
- Modern touch controls on glass front
- LED strip for uniform lighting
- Wide rack – can be used as a shelf for herbs, for example
- Efficient filtration- 10-ply stainless-steel grease filter

B

EAN: 4002516399216 / Material number: 11683850 / Old Material Number: 28909140GB

Construction type	
Wall mounted cooker hood	•
Operating modes	
Type of air guide	Convertible
Active charcoal filter (order separately)	DKF 29 charcoal filter
Design	
Colour	Obsidian black
User convenience	
Electronic controls	•
Touch controls	•
Power levels (number without Booster level)	3
Programmable Booster level switch-off	•
Silence package	•
Efficiency and sustainability	
Energy efficiency class (A+++ to D)	B
Annual energy consumption in kWh/year	67.7
Fluid dynamic efficiency class	B
Lighting efficiency class	A
Grease filtering efficiency class	B
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
Lighting	
LED	•
Number x W	1 x 3,2 W
Light intensity in lx	300 lx
Colour temperature in K	3500 Kelvin
Blower	
Dual-action blower	•
AC motor	•
Extraction	
Air throughput in Level 1 (m ³ /h) according to EN 61591	205
Air throughput in Level 2 (m ³ /h) according to EN 61591	310
Air throughput in Intensive level (m ³ /h) according to EN 61591	670
Air throughput in Level 3 (m ³ /h) according to EN 61591	415
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	39.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	45.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	50.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	62.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	25.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	31.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	36.0

DA 9091 W Screen

Wall mounted cooker hood

With vertical glass front and extremely flat design for more headroom.



EAN: 4002516399216 / Material number: 11683850 / Old Material Number: 28909140GB

Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13 48.0

Recirculation

Air throughput in Level 1 (m³/h) according to EN 61591 190

Air throughput in Level 2 (m³/h) according to EN 61591 290

Air throughput in Level 3 (m³/h) according to EN 61591 385

Air throughput in Booster level (m³/h) according to EN 61591 605

Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3 44.0

Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3 51.0

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3 58.0

Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3 69.0

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13 30.0

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13 37.0

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13 44.0

Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13 55.0

Safety

Safety switch-off •

Single-ply safety glass (ESG) •

Technical data

Canopy width in mm 880

Overall height for vented and external in in. (mm) 500

Overall height for extraction mode and external mode cooker hoods in mm 500

Overall height for recirculation in in. (mm) 500

Overall height for recirculation mode cooker hoods in mm 500

Canopy height in mm 500

Canopy depth in mm 260

Net weight in kg 21.5

Length of supply lead in m 1.5

Standard plug fitted •

Minimum height above electric hobs in mm 450

Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm 650

Total rated load in kW 0.20

Voltage in V 230

Fuse rating in A 10

Frequency in Hz 50

Number of phases 1

Installation notes

Extraction ducting connection at top •

Extraction connection at top and rear •

Diameter of exhaust duct in mm 150

Optional accessories

Active charcoal filter DKF 29 Kohlefilter

DA 9091 W Screen

Wall mounted cooker hood

With vertical glass front and extremely flat design for more headroom.



EAN: 4002516399216 / Material number: 11683850 / Old Material Number: 28909140GB


Active charcoal filter, can be reactivated

DKF 29-R Kohlefilter

DA 9091 W Screen


Wall mounted cooker hood

With vertical glass front and extremely flat design for more headroom.

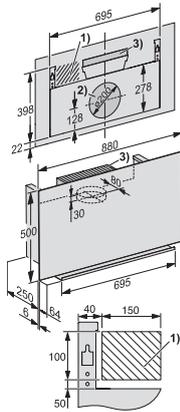

DA 9091 W (Installation drawings)

1) Installation area for the mains connection., 2) Cut-out when ducting to the rear. Alternative vent connection at the back., 3) Air outlet for recirculation. A distance of at least 200 mm must be maintained between the top of the appliance and the ceiling or any furniture units installed above the appliance.,

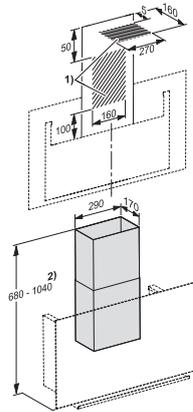

DADC 9000 (Installation drawings)

1) Installation area for exhaust air ducting with DA 9090 W.,
2) Appliance height with DA 9090 W.,